

HETEROGENEOUS

GRABO

Acoustic Pro

HIGH PERFORMANCE ACOUSTICAL FLOOR COVERING

RECOMMENDED USAGE


- > Library
- > Education
- > Healthcare
- > Corporate
- > Retail
- > Anywhere acoustical property is needed

PERFORMANCE, FEATURES & BENEFITS

Excellent acoustic properties (≥ 19 dB) | Excellent foot comfort
Dimensionally stable | Increased lifespan | Antistatic
Anti-bacterial | 7 year warranty

CONSTRUCTION

- PUR Surface Wear layer
- Design
- Compact layer
- Glass fibre reinforcement
- Foam backing

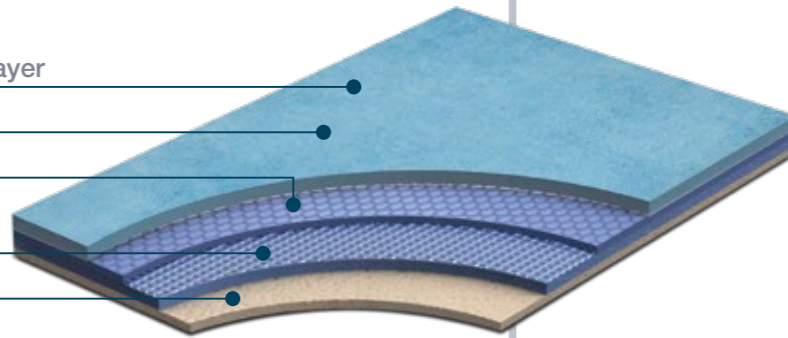

SPECIFICATIONS

DESCRIPTION

Construction	heterogeneous	
Total thickness	EN ISO 24346	3,2 mm
Wear layer thickness	EN ISO 24340	0,55 mm
Width of roll	EN ISO 24341	2 4 m
Length of roll	EN ISO 24341	25 lm
Total weight	EN ISO 23997	2,5 kg/m ²

CLASSIFICATION

European classification	EN 685	class: 33/42
-------------------------	--------	--------------

PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0,2 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	class: Bfl-s1
	BS 476	class: Class1
	Gost 30402-94	class: G1
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
Slip resistance	DIN 51130	R9
Electrical resistance	EN 1815	< 2 kV
	EN 1081	$\leq 10^9 \Omega$
Chemical resistance	EN ISO 26987	✓
Bacterial resistance	EN ISO 846:1999	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment	PUR Surface	
Anti bacterial and fungicid treatment	graboSAN	
Seaming method	hot or cold welding	
Warranty	7 year	



ACOUSTIC PRO

3.2
mm

TOTAL THICKNESS

2.5
kg/m²

TOTAL WEIGHT

2 | 4
m

WIDTH OF ROLLS

33 | 42


EUROPEAN CLASSIFICATION

Acoustic Pro

PUR
SURFACE
SOLVENT
FREE
NO
WAX
grabo
SAN
minimize
the growth of
microorganisms




4313-471-4

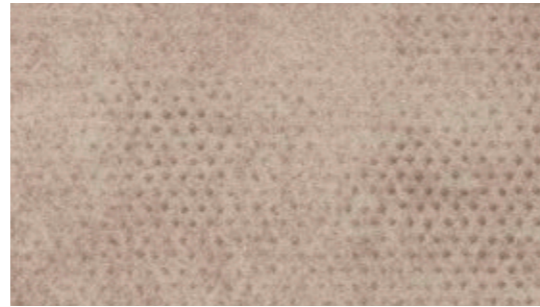

4313-470-4




4313-464-4

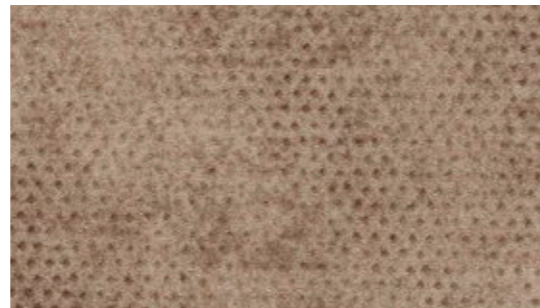

4313-467-4



4313-460-4

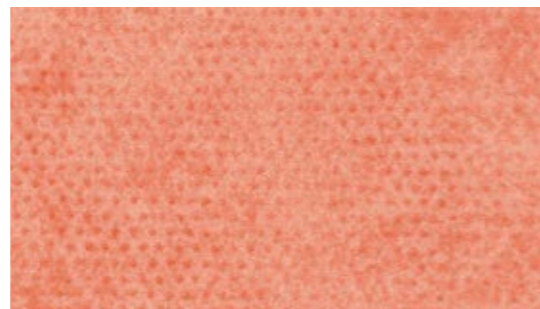

4313-465-4



4313-458-4




4313-472-4



4313-473-4



4313-474-4

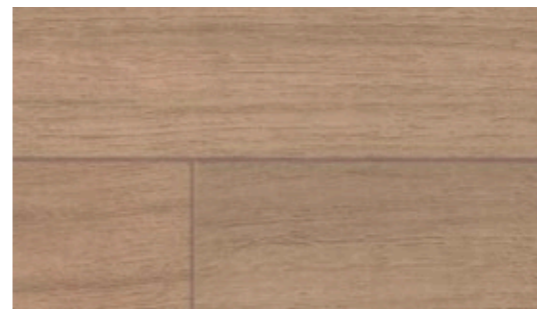

4259-501-5



4259-503-5



4259-504-5

